




DATA SHEET

Coax Cable Connector

BNC-113 BNC-113RG

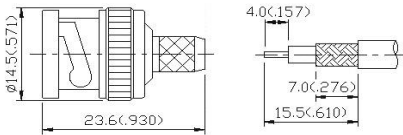

BNC-113



BNC-113RG

Description

Straight Cable Plug Crimp
BNC-113RG - Reverse Gender Pin

Suits Cables:

BNC-113	RG58 LMR-195 CNT-195
BNC-113RG	RG58 LMR-195 CNT-195

Technical Data

Electrical

Impedance 50 Ohm
Max Frequency 4 GHz

Mechanical & Environmental Data

Centre contact Crimp
Outer Contact Crimp
Mating Two Stud Bayonet coupling
Durability 500 matings
Coupling nut retention 100lbs Max
Cable Retention 40 lbs min
Temperature Range -65° to 165° C
Vibration MIL-STD-202 Test Cond B
Salt Spray MIL-STD-101 Test Cond B
Thermal Shock MIL-STD-107 Test Cond B

Material Data

Parts	Material	Plating BNC-113(RG)
Connector Body	Brass	Nickel
Centre contact	Brass	Gold
Insulation	Teflon	-
Gasket	Silicone Rubber	-
Crimp Ferrule	Annealed Copper	Nickel